


KODAK Hearing Aid Battery K675ZA

Effective: 11/01/2021

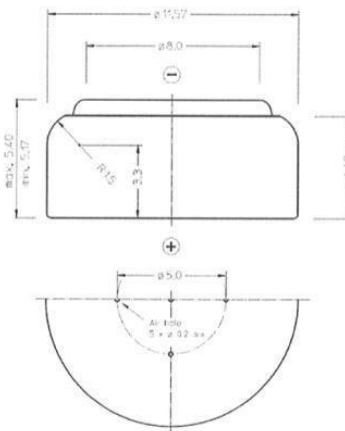

Chemical system:	Zinc / Air
Designations:	IEC PR44, ANSI 7003ZD
Nominal Voltage :	1.45 V
Nominal Capacity:	650 mAh *
Internal Impedance:	max. 4 Ω @ 1kHz
Weight:	approx. 1.83 g
Volume:	approx. 0.55 cm ³
Normal storage temperature:	+10 – +30 °C, 20 – 75 %
Normal Operating temperatures:	0 – +45 °C, 25 – 70 %
Reaction:	2 ZN+ O ₂ → 2ZnO
High Rate Pulse Capacity:	570 mAh **
High Rate Pulse Energy:	700 mWh **


*IEC High Power test 24mA / 8mA for 100 ms every 2 hours, for 12h/24h to 1.05V

**600 Ohms 12h/day to 1.1V

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.

DANGER: Keep batteries out of reach of children. If swallowed, the battery can cause serious injury or death. Severe burns can occur within hours of ingestion. If you suspect that a battery has been ingested, seek immediate medical attention. Have doctor call CHEMTREC Day or Night on 1-800-424-9300 / +1 703-527-3887. **CAUTION:** Ensure that the battery compartment is completely secure, meaning closed and locked to prevent easy access by children. If the battery compartment cannot be completely secured, discontinue use of the product or keep out of sight and reach of children.



The Kodak trademark, logo and trade dress are used under license from Kodak.
 © 2021 STRAND EUROPE LTD.
www.kodakbatteries.strand europe.com