




KODAK K123LA MAX Lithium battery

Effective: 12/05/2026

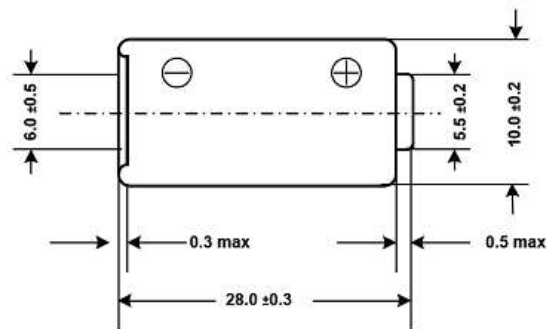


Dimensions are in millimeters and include label.

Chemical system:	Lithium/Manganese Dioxide, Li / MnO ₂
Designations:	IEC CR17345, ANSI 5018LC
Nominal Voltage :	3.0 V
Nominal Capacity:	1500 mAh at 10 mA to 2.0 Volts
Weight:	16 g
Volume:	7.8 cm ³
Normal storage temperature:	+5– +25°C, RH no more than 75%.
Normal Operating temperatures:	-20 – +50°C
Maximum Operating temperatures:	-40 – +60°C
Reaction:	Li + MnO ₂ →LiMnO ₂
Terminals:	Flat contacts
Jacket:	Aluminium label
Approximate Lithium content:	0.56 grams / cell

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.

Recognized under the
Component Program of
Underwriters Laboratories INC. 



Brand Licensee
KODAK Batteries
KODAK LED Flashlights

The Kodak trademark, logo and trade dress are used under license from Kodak.
© 2026 STRAND EUROPE LTD.
www.kodakbatteries.strandeuropa.com