




KODAK MAX Lithium Battery K3AFR

Effective: 08/04/2026

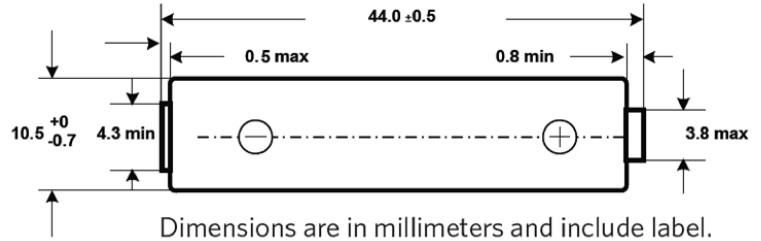

Chemical system:	Lithium/Iron Disulfide, Li/FeS ₂
Designations:	IEC FR03, ANSI 24LF
Nominal Voltage:	1.5V
Nominal Capacity:	1100 mAh at 75 Ohms to 0.8 Volts
Internal Impedance:	0.45 Ohms (typically)
Average Weight:	7.5 g
Average Volume:	3.8 cm ³
Recommended storage temperature:	+5 – +25 °C, RH no more than 75%.
Operating temperatures:	-40 – +60 °C
Reaction:	2 Li + FeS ₂ → Li ₂ FeS ₂
Terminals:	Flat contacts, protruding negative
Jacket:	Aluminium label
Lithium Content:	Under 1 g

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.

