




KODAK Super Heavy Duty Zinc Battery K3AHZ

Effective: 05/03/2023

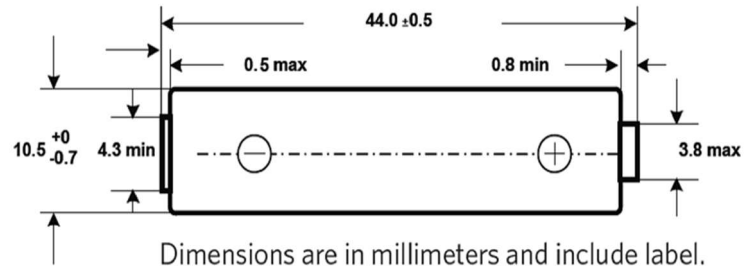

| | |
|---|---|
| Chemical system: | Zinc Chloride, ZnCl ₂ |
| Designations: | IEC R03, ANSI 24D |
| Nominal Voltage: | 1.5V |
| Nominal Capacity: | 450 mAh at 75 Ohm to 0.8V |
| Internal Impedance: | 1.1 Ohms (max) |
| Average Weight: | 7.0 g |
| Average Volume: | 3.8 cm ³ |
| Recommended storage temperature: | 10 – 25 °C, RH no more than 75%. |
| Operating temperatures: | 0 – 45 °C |
| Reaction: | $2 \text{MnO}_2 + \text{Zn} + \text{H}_2\text{O} \rightarrow 2 \text{MnOOH} + \text{ZnO}$ |
| Terminals: | Flat contacts |
| Jacket: | PVC label |

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) SDS sheets are available on request from Strand Europe Ltd.

