




KODAK KCR2 MAX Lithium battery

Effective: 24/04/2026

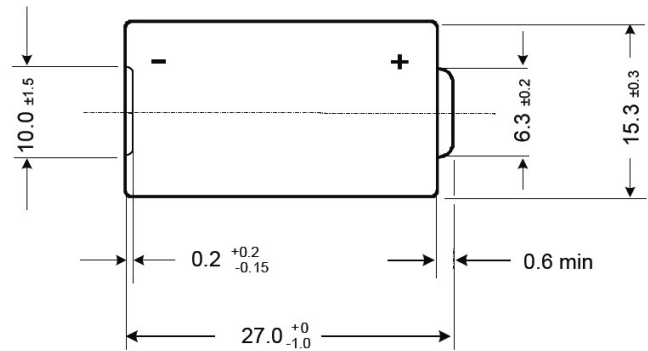

Dimensions are in millimeters and include label.

Chemical system:	Lithium/Manganese Dioxide, Li / MnO ₂
Designations:	IEC CR15H270, ANSI 5046LC
Nominal Voltage:	3.0 V
Nominal Capacity:	800 mAh at 10 mA to 1.8 Volts
Weight:	10 g
Volume:	5.16 cm ³
Normal storage temperature:	+10 – +25 °C, RH no more than 75%.
Normal Operating temperatures:	-20 – +50 °C
Maximum Operating temperatures:	-40 – +60°C
Reaction:	Li + MnO ₂ → LiMnO ₂
Terminals:	Flat contacts
Jacket:	Aluminium label
Approximate Lithium content:	<=0.3 grams / cell

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.

