



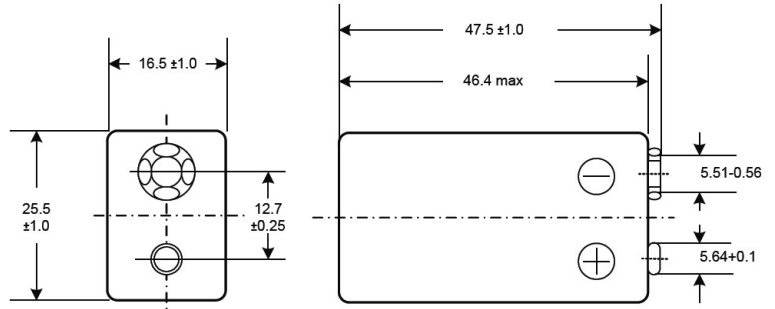

KODAK Super Heavy Duty Zinc Battery K9VHZ

Effective: 05/03/2026



Dimensions are in millimeters and include label.

<b>Chemical system:</b>	Zinc Chloride, ZnCl <sub>2</sub>
<b>Designations :</b>	IEC 6F22, ANSI 1604
<b>Nominal Voltage :</b>	9.0 Volts
<b>Nominal Capacity:</b>	250 mAh at 620 Ohm to 4.8V
<b>Internal Impedance:</b>	0.08 Ohms (typically)
<b>Average Weight:</b>	38 g
<b>Average Volume:</b>	21.8 cm <sup>3</sup>
<b>Recommended storage temperature:</b>	10 – 25 °C, RH no more than 75%.
<b>Operating temperatures:</b>	0 – 45 °C
<b>Reaction:</b>	2 MnO <sub>2</sub> + Zn + H <sub>2</sub> O → 2 MnOOH + ZnO
<b>Terminals:</b>	Miniature Snap
<b>Jacket:</b>	PVC label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) SDS sheets are available on request from Strand Europe Ltd.

